

WÜRTH GULF

CAR CARE



WÜRTH PERFECTION LINE

passion needs care

Because only those who strive for perfection with commitment achieve results that impress. The Würth Perfection Line will help you to prepare vehicles in a way that will take your clients' breath away.

A perfect shine – for perfect additional business.

Rediscover your passion for vehicle preparation all over again – with the new Würth Perfection Line!



ECCENTRIC POLISHING MACHINE EPM 160-E



Compact and high-performance, with 1010 W motor and 8 mm polishing stroke for a high level of efficiency. Ideally suited for hologram-free polishing thanks to permanent positive drive.

Art.No. 5707 5000

P.Qty. 1

Compact, ergonomic, quiet

- Low weight for easy handling
- Low noise emissions
- Extremely smooth running thanks to equalising weight
- Accurate handling thanks to dome grip
Ergonomically shaped bail handle can be unscrewed.

Constant electronics

A tachometer generator ensures that the speed remains constant, even under loads.

Speed pre-selection

Infinitely adjustable rotational frequency for easily adjusted polishing speed.

Special dampened Velcro plate

Straightforward attachment of polishing pad.

Accelerator switch and soft start

- The machine starts slowly, carefully and without jerking or spraying polish
- Lock for fatigue-free and comfortable work over long periods
- Soft start for improved user safety and motor protection

Power-on inhibitor

Prevents unintentional start-ups after power cuts.

Overload protection

Increases the machine's service life.

Temperature monitoring


No burning through coils.

Ideal for heat-sensitive finishes

Low surface heat generation



Powerful: 1,010 Watt motor
Effective: 8 mm polishing stroke for high effectiveness
Flexible: Adjustable speed of 160–480 rpm
Staying power: The tachometer generator keeps the speed constant even under load
Safe: Restart lock, overload protection and temperature monitoring

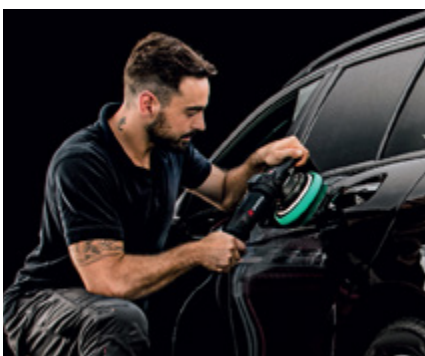

Application

Vehicle detailing


- Hologram-free polishing of paintwork damage and sealing of paintwork thanks to eccentric movements and large stroke.
- Removal of existing holograms and

polishing smears, including on dark paintwork.

- Ideally suited to removing damage from weathered paintwork with minor scratches, traces of use, smears, hairline cracks and for highgloss polishing.

Velcro adhesive disc

Art.No. 0586 500140

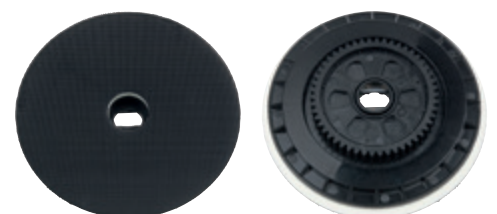

POLISHING MACHINE EPM 2000-7

Art.No. 5717 010030

P.Qty: 1



Powerful polishing machine in a compact and handy package

Extremely handy and lightweight

Minimal force needed when working side surfaces.

Gentle start and restarting protection (after power failure)


Safer working for the user.

Speed Control

Allows polishing of different materials

Technical Data	
Voltage / Hz	220-240V 50/60Hz
Protection class	□ / II
Power	1.200 watt
No load speed	800-2400 rpm
Diameter	Max. 180mm
Spindle thread	M14
Weight	3.4 kg

Delivery Scope		
Designation	Art.No.	P.Qty
Polishing Machine EPM 2000-7	5717 010030	1
Support plate included		

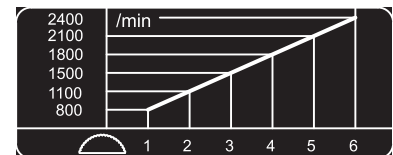

HOOK AND LOOP SUPPORT PLATE



For securing polishing pads, lambskin etc. with Velcro mount.

Optimum results










Foam intermediate layer to provide a good feeling for the surface

Saves time

Velcro mount for a quick pad change

Fig	Art.No	Diameter	P.Qty
1	0586 0180	80 mm	1
2	0586 01125	125 mm	1
3	0586 01150	150 mm	1

POLISHING PAD

Fig	Art.No	Color	Hardness degree	Diameter	P.Qty
	0585 025090	Green	Extra hard	90 mm	4
	0585 025145	Green	Extra hard	145 mm	2
	0585 025170	Green	Extra hard	170 mm	2
	0585 027090	Blue	Hard	90 mm	4
	0585 027145	Blue	Hard	145 mm	2
	0585 027170	Blue	Hard	170 mm	2
	0585 026090	Orange	Soft	90 mm	4
	0585 026145	Orange	Soft	145 mm	2
	0585 026170	Orange	Soft	170 mm	2

Polishing pads in three different abrasive grades

Maximised effect with minimised wear

Surface area significantly increased owing to surface structure (criss-cross scoring). This allows a significantly larger amount of polish to be absorbed, delivering a greater removal rate and prolonged polishing grain yield.

Open-pore foam for a consistent removal rate

Polishing pads produced from high quality open-pore foam. Heat generated during polishing is dissipated effectively owing to porous and structured surface.

Greater flexibility on any body shape

Polishing pads suitable for any shape and curvature of vehicle owing to rounded edges, and thanks to this intelligent geometry prevent new paint faults.

Harmonious polishing results

145 mm and 170 mm diameters offer a drill hole for rapid, convenient and perfect centring. Environmentally friendly Polishing pad easily removed from Velcro plate thanks to edge bevel at the edge of the Velcro.

LAMBSKIN

Fig	Version	Pad dia. in mm	Art.No	P.Qty
1	Black - 125 Suitable for Support Plate Art. No. 0586 01	135 mm	0585 135	1
2	White - 125 Suitable for Support Plate Art. No. 0586 01	135 mm	0585 235	1



1



2

FAST GRINDING POLISH P10 PLUS



Art.No	Contents	P.Qty
0893 150010	1 kg	1/5

Applications

Shake bottle well before using. Moisten the surface of the selected polishing pad evenly with the paste and apply a small quantity on the surface to be polished. Lay the polishing pad evenly on the area and

start the machine. Polish the area with a certain pressure until grinding traces or paint imperfections have been removed. Remove residual polish with a microfiber cloth. Remove any remaining streaks with P30 Anti-Hologram Polish Plus.

Highly abrasive high-gloss polish for quickly removing surface defects in fresh repair and fully hardened top coats.

Innovative powered consistency made from aluminium oxide

- Extremely high surface removal rate and unprecedented gloss level
- Sanding grooves from a grain of P1500 upwards can be effortlessly removed

Thick consistency

- Polish does not spray everywhere
- Long-lasting
- Minimum dust creation
- No laborious re-cleaning of adjacent areas

Can be applied manually and by machine

For conventional and scratchproof paint types

Suitable for use on used and new paint surfaces

Silicone-free

 **Art.No. 0585 025145**
Green Pad

HIGH-GLOSS POLISH P20 PLUS



Art.No	Contents	P.Qty
0893 150020	1 kg	1/5

Applications

Shake bottle well before using. Moisten the surface of the selected polishing pad evenly with the paste and apply a small quantity on the surface to be polished. Lay the polishing pad evenly on the area and

start the machine. Polish the area with a certain pressure until grinding traces or paint imperfections have been removed. Remove residual polish with a microfiber cloth. Remove any remaining streaks with P20 Anti-Hologram Polish Plus.

Medium-abrasive high-gloss polish for efficient paint preparation

Specifically matched powdered property made from aluminium oxide

- Moderate surface removal rate and extremely high gloss level
- Sanding grooves from a grain of P2000 can be easily removed

Thick consistency.

- Polish does not spray everywhere
- Long-lasting
- Minimum dust creation
- No laborious re-cleaning of adjacent areas

Can be applied manually and by machine

Silicone-free

 **Art.No. 0585 027145**
Blue Pad

ANTI-HOLOGRAM POLISH P30 PLUS



Art.No	Contents	P.Qty
0893 150030	1 kg	1/5

Applications

Shake bottle well before using. Moisten the surface of the selected polishing pad evenly with the paste and apply a small quantity on the surface to be polished. Lay

the polishing pad evenly on the area and start the machine. Polish the area with a certain pressure until grinding traces or paint imperfections have been removed. Remove residual polish with a microfiber cloth.

High-gloss finish for permanently removing streaks and holograms on dark vehicle paints..

Unique powdered property made from aluminium oxide

- Fine removal with simultaneous unique mirror gloss
- Sanding grooves from a grain of P3000 can be easily removed

Thick consistency.

- Polish does not spray everywhere
- Efficient in consumption
- Minimum dust creation

Can be applied manually and by machine

Silicone-free

 **Art.No. 0585 026145**
Orange Pad

GRINDING POLISH 3-IN-1, P - ONE STEP



Art.No	Contents	P.Qty
0893 150060	1 kg	1/

Applications

A revolutionary 3-in-1 polish for highly efficient removal of scratches, wear marks and holograms in the paint treatment in just one step. For rapid removal of defects in fresh repair and hardened topcoats and for polishing traces of use on used paints. Shake well before use. Spread the polish evenly on the polishing pad and apply a

small amount to the surface to be treated. Position the polishing pad flat on the area and start the machine. Apply light pressure at 1500 - 2000 rpm to the surface until the grinding marks or paint irritations have been removed. Work in sections! Remove residual polish with a microfibre cloth.

- Rotary 1500 - 2000 rpm
- Eccentric 2000 - 10,000 rpm

P - ONE STEP 3IN1 - Grinding polish, finish polish and wax

Polish out grinding marks, reliably remove holograms and streaks, and protect the resulting high-gloss surface for a long time with just one all-round product.

- The high-performance extra-class grinding paste for quick and effortless removal of defects.
- Thanks to the innovative powder composition of aluminium oxide, paint irritations on both scratch-resistant and conventional paints can be polished very efficiently and with an outstanding degree of gloss.
- The included paint sealant with carnauba wax ensures long-lasting protection.

Note:

We recommend our blue or orange polishing pads for polishing.

POLISHING PUCK



Black Polishing Puck

An ergonomical shape made of very fine-pored foam to efficiently seal painted and plastic surfaces. Your advantage: Even hard-to-reach areas can be treated!

Size 130 x 50 mm

Art.No. 0585 128130

P.Qty: 1

Orange Polishing Puck

The manual solution for all polishes: A perfect ergonomical shape made of solid yet fine-pored foam for working manually with all polishes. Your advantage: A puck for all polishes!

Size 130 x 50 mm

Art.No. 0585 126130

P.Qty: 1



CLEANING PAD CLAY SERIES



Art.No	Diameter	Color	P.Qty
0585 300150	150 mm	Black/red	1

Instructions

Rinse the area to be cleaned and the cleaning pad thoroughly with water. Then treat the damp surface with the cleaning pad, without applying pressure. To clean with the cleaning pad, the surface and the cleaning pad must always be damp. We recommend

moistening the surface and the cleaning pad with a pump spray bottle as required during the cleaning process. After completing the cleaning process, simply remove any residue with a microfibre cloth. The surface is perfectly prepared for polishing or sealing.

Efficient deep cleaning and perfect preparation of painted surfaces for the best polishing results.

Features

- Easily removes stubborn residue and dirt from painted surfaces that cannot be removed by conventional cleaning, producing a mirror-like finish.
- Especially gentle cleaning owing to very low heat development and avoidance of aggressive cleaning agents.
- Washable and reusable
- Considerable time, energy and cost savings
- Very easy to apply

Applications

For fast and effortless removal of paint spray mist, resin, tar and insect remains, especially in the detailing of new and used vehicles. Painted surfaces, glass, chrome, etc.

CLEANING GLOVE CLAY SERIES



Art.No	Diameter	Color	P.Qty
0585 300210	210 x 140 mm	Black/red	1

Instructions

Rinse the area to be cleaned and the cleaning pad thoroughly with water. Then treat the damp surface with the cleaning pad, without applying pressure. To clean with the cleaning pad, the surface and the cleaning pad must always be damp. We recommend

moistening the surface and the cleaning pad with a pump spray bottle as required during the cleaning process. After completing the cleaning process, simply remove any residue with a microfibre cloth. The surface is perfectly prepared for polishing or sealing.

Efficient deep cleaning and perfect preparation of painted surfaces for the best polishing results.

Features

- Easily removes stubborn residues and stains from painted surfaces that cannot be removed by conventional cleaning, producing a mirror-like finish.
- Especially gentle cleaning owing to very low heat development and by excluding aggressive cleaning agents.
- Washable and reusable
- Considerable time, energy and cost savings
- Very easy to apply

Applications

For fast and effortless removal of paint spray mist, resin, tar and insect remains, especially in the detailing of new and used vehicles. Painted surfaces, glass, chrome, etc.

CLEANING CLOTH CLAY SERIES


Efficient deep cleaning and perfect preparation of painted surfaces for the best polishing results.

Features

- Easily removes stubborn residues and stains from painted surfaces that cannot be removed by conventional cleaning, producing a mirror-like finish.
- Especially gentle cleaning owing to very low heat development and by excluding aggressive cleaning agents.
- Washable and reusable
- Considerable time, energy and cost savings
- Very easy to apply

Applications

For fast and effortless removal of paint spray mist, resin, tar and insect remains, especially in the detailing of new and used vehicles. Painted surfaces, glass, chrome, etc.

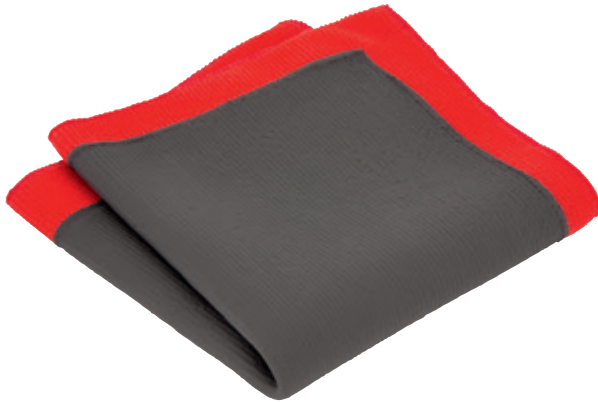

Art.No	Diameter	Color	P.Qty
0585 300320	320 x 300 mm	Black/red	1


Instructions

Rinse the area to be cleaned and the cleaning pad thoroughly with water. Then treat the damp surface with the cleaning pad, without applying pressure. To clean with the cleaning pad, the surface and the cleaning pad must always be damp. We

recommend moistening the surface and the cleaning pad with a pump spray bottle as required during the cleaning process. After completing the cleaning process, simply remove any residue with a microfibre cloth. The surface is perfectly prepared for polishing or sealing.



CLAY POLISH AND CLEANER

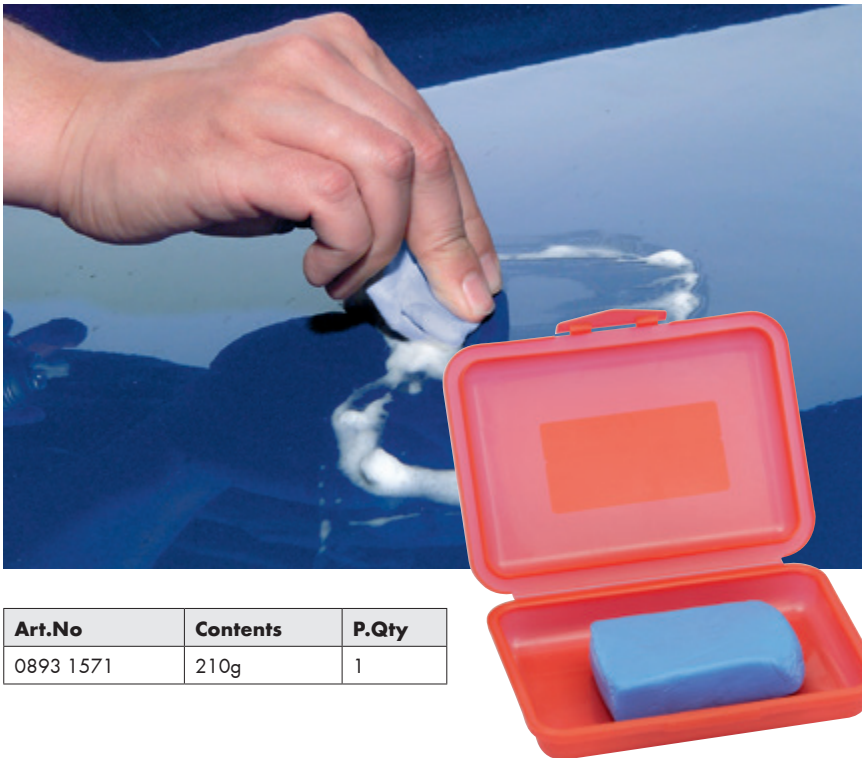

Art.No	Contents	P.Qty
0893 1571	210g	1

Synthetic clay used for the removal of spray mist and other contaminants

Contains synthetic polymers without abrasives

- Gentle particle removal without grinding or repolishing
- Deep-pore cleaning of all smooth surfaces
- Stays soft, does not become brittle

Solvent- and chemical-free

- Paints and sensitive surfaces are not attacked

Application

For fast and effortless removal of paint spray mist, resin, tar and insect remains, especially in the detailing of new and used vehicles.

Area of use

Moisten surface and clay with a lubricant (e.g. Würth Active Glass Cleaner). Process surface using light pressure. Wipe dry with a soft, clean cloth.

GLOSS SEAL



Art.No	Contents	P.Qty
0893 0126	250 ml	1/24

Provides lasting, reliable protection with extremely simple application.

Features

- Resistant to weathering, salt, sunlight, cold cleaner and other influences which usually affect paint.
- Not aggressive and therefore gentle to paint.
- Achieves an extremely smooth paint surface and protection for up to 18 months.
- Silicone-free.

Application

Vehicle must be thoroughly washed and all wax removed. Shake well before using. Apply gloss seal with a soft cloth (not too thin in order to achieve optimum protection). Allow to dry. Polish with a cloth. Vehicle can be processed in sections or at one time accessories.

AUTO CLEANING SPONGE



Good cleaning performance: multiple cell structure with different pore sizes

Supple

Gentle on paintwork, permanently resilient surface

Art.No	Size in cm	P.Qty
0899 700400	170.5 x 12 x 6	5

MICRO-FIBER-CLOTH



Application

The cleaning and polishing cloth is suitable for all smooth surfaces, such as glass, chrome, paint, stainless steel, acrylic, plastic, aluminum and ceramic. For example, this enables car windows or paint surfaces on cars to be cleaned and polished lint-free.

Notes

The cloth should be thoroughly rinsed with clear water and wrung out before use. Then the surface can be cleaned moist or dry. With heavy soiling like oil or grease, the cloth can be washed with commercial detergents in the washing machine at up to 60 °C. The cloth should not be dried in a drier.

Cleaning and polishing cloth for streak and lint-free results on smooth surfaces like glass, chrome and paint.

Features

- High cleaning power without chemical additives.
- 40% less use of force.
- Cloth tear-proof and resistant to extension.
- High moisture absorption.
- Optimum cleaning and polishing results.
- Streak-free use.
- Absorbs 4 times its own weight.
- Washable at up to 60°C in the washing machine.

Art.No	Size in cm	P.Qty
0899 900117	40 x 40	1

SPRAY SHINE



Provides new and used cars with a high gloss in just minutes

Features

- Minimal time required
- Vehicle looks like it has just been polished
- Silicone-free

Use

Spray on and polish with a dry cloth

Art.No	Contents	P.Qty
0893 011500	500 ml	1/12

IPA CLEANER



Application

- Best use before applying nano ceramic
- Ideal for cleaning plastic surfaces prior to painting/priming or applying adhesive. Can be used as a pre-cleaner for wrapping vehicles or as an inspection spray for vehicle conditioning (polishing).
- Removes adhesive tape residue, labels, bitumen, greases, resins, inks, solder and

flux residues, fresh PU foam residues from lubrication and even the most stubborn dirt and grime.

- Suitable for a broad range of uses in the fields of electronics, precision engineering and optics. For example, can be used to clean optical devices, reading and writing heads, precision instruments, PCBs, mirrors and highly polished metal surfaces.

For universal use.

Gentle and effective cleaning

Suitable for delicate surfaces

Removes both greasy and water-soluble dirt.

Leaves no stains or streaks behind on bare metal or glass surfaces

As product evaporates entirely without residue after a short while.

Instructions

For normal surfaces, apply the cleaner directly onto the area to be cleaned and quickly wipe off with a soft, clean, lint-free cloth. For delicate surfaces, spray onto a cloth and wipe down surface.

Note

Check whether delicate plastics or surfaces are compatible with the cleaner prior to treating by testing on an area that is not visible.

Art.No	Contents	P.Qty
0893 223500	500ml	1
0893 223505	5 ltr	1

PLASTIC DYE PLAST PT



Art.No	Contents	P.Qty
0893 2801	75 ml	12

For improving the appearance of all plastic parts on cars.

Features

- Free from solvents
- High-quality, emulsion-based plastic paint
- Return faded plastic to look like new
- Easy to apply
- Apply in the sun
- Do not apply or store at temperatures below +7°C

Attention

Plastic dye is sensitive to moisture when being applied, therefore do not apply it in the rain or bring it into contact with water shortly after applying it

Area of use

Bumpers, synthetic leather roofs, folding roofs (fabric as well), plastic interior panelling, rubber parts, water hoses, running board panels etc.

BMF CLEANER

Environmentally friendly cleaning agent for workshops, machinery and vehicles.

Features

- No phosphates, solvents and corrosive substances
- Extremely biodegradable
- Can be used mechanically, manually or in high-pressure units
- Powerful at dissolving grease but is still mild and gentle on materials
- Does not attack paints, rubber or plastics
- Fast-separating in waste water in accordance with German Ecological Standard Test B 5105
- pH value: 9.4
- Silicone-free
- AOX-free

Application

- BMF cleaner in high-pressure cleaner: Concentration 3-5 %
- BMF cleaner in floor cleaning machines: Concentration 3-10%



Art.No	Contents	Mix Ratio	P.Qty.
0893 1182	5 ltr	1:4	1
0893 1183	20 ltr		1

MANUAL SHAMPOO

PH neutral detergent suitable for hand washing vehicles, it produces lots of thick, rich foam easy to be rinsed out. It leaves a pleasant apple scents and makes the body work extremely shiny.

Features

- Foaming detergent with neutral PH for external hand cleaning.
- Appearance and color - green
- Odour - Characteristic
- PH - 7 approx
- Oxidizing Pressure - n.d
- Relative Density - 1 approx
- Solubility in water - Total
- Mixing Ratio
- 1Ltr - 200 liters

Silicone-free



Art.No	Contents	Mix Ratio	P.Qty.
1890 005101	5 ltr	1:100	1
1890 025101	20 ltr		1

PROFESSIONAL ANTISTATIC SHAMPOO



Application

Mix the Antistatic with water, apply the mixture on the target car (on Dry) which will save 50 % of the water & Time. Leave the mixture for 30 Seconds and clean it by water, there is no rubbed required, which will save 50 % of the manpower.

Note

Mixture should not be Rubbed or touched by hands.

New technology in the car washing industry for optimum cleaning effect and less water, time and manpower. Touch-less washing shampoo with high performing detergent both on organic and inorganic dirt, suitable in any season with fragrance's effect.

Technical Data	
High Pressure application percentage	1:8
PH level	11.5
Foaming Level	2
Silicone-free	Yes

- **50 % less water**
- **50 less Time**
- **50 % less Manpower**
- **100 % more cleaning effectiveness**
- **Environment-friendly**
- **With Fragrance's effect.**

Art.No	Contents	Mix Ratio	P.Qty.
1890 005001	5 ltr	1:40	1
1890 005002	25 kg		1

PROFESSIONAL WAX



Application

Mix the wax with water under 10% concentration for the manual spray pump, briefly spray all the parts of the car, and gently wiped it off.

Note

For the manual Pump spray (0891 503001) the mixing ratio is 10 %.

Premium perfumed wax with exceptional protective and glossy properties for painted and metal surfaces, water and dirt resistance to keep the paint work in excellent condition with a glossy finish.

Technical Data	
Manual pump application	10 %
Foam sprayer application	3 %
PH level	5

- **Water Resistance**
- **Paint Protection**
- **Glossy appearance**
- **Strong Fragrance's effect**
- **Environment-friendly**

Art.No	Contents	Mix Ratio	P.Qty.
1890 005201	5 ltr	1:10	1

ENGINE WASH



Art.No	Designation	Contents	Mix Ratio	P.Qty.
0893 01305	Canister	5L	1:10	1/12
0893 01320	Canister	20L		1

Powerful engine cleaner for engines, engine compartments and gearboxes

High cleaning performance

- Quickly and thoroughly removes oil, grease, tar and other soiling
- The cleaner adheres to vertical surfaces due to its viscosity, which means that it can get under the dirt and loosen it for optimal effect.

Gentle on materials

Sensitive surfaces such as aluminium, tin and zinc as well as painted surfaces, plastics and rubber are not attacked due to the lack of aggressive substances and the neutral pH value.

Particularly gentle on your skin

pH-neutral

95% (OECD and closed bottle test)

Fast-separating in accordance with German Ecological Standard Test B 5105

Oily, greasy soiling is not emulsified, but penetrated and dissolved. The resulting wastewater can therefore be separated via the light-oil separator.

Contains no AOX compounds and organic solvents

Contains no phosphates and no complex agents

Silicone-free

Pump spray bottle

Art.No. 0891 503001



Application

Spray the undiluted engine wash onto the engine, engine compartment and gearbox. Rinse off thoroughly with a high-pressure cleaner

after a brief soaking time. Can also be used in a high-pressure device. Can be used with cold and warm water. Mixing ratio 1:1 to 1:10

ENGINE CLEANER



Application

Thoroughly spray parts from a distance 20-40 cm, allow to soak in for 10 min. and rinse off the dissolved dirt with a strong water jet (high-pressure cleaner)

Note: The ignition system must first be suitably covered in order to prevent starting dif-

ficulties after washing the engine. For effective cleaning performance, we recommend the use of a hot-water highpressure cleaner. The cleaning performance when the cleaner is applied manually is actively supported by the use of hot water.

Art.No	Contents	P.Qty
0890 23	300 ml	1/12

Powerful cleaner for engine, transmission, machine, chassis and body

Removes oil, grease, tar and other soiling quickly and simply

Excellent application and results.

Gentle on materials

Broad range of applications.

Loose containers can be processed manually and in the high-pressure cleaner

Flexible possible uses.

Biodegradable > 95 %

Contains no AOX compounds, formaldehyde or halogenated hydrocarbons.

Separates easily

No impairment of the light liquid separator is expected when used properly and when there is normal soiling.

Areas of use

Engines, transmissions, chassis, body, machines, workshop floors etc.

PROTECTIVE ENGINE LACQUER



Application

Shake can vigorously prior to use. Thoroughly clean the surfaces to be treated with ABSOBON Engine Compartment Cleaner and allow to dry. Turn ignition off. Apply by

spraying evenly until a cohesive glossy film is created. After use, invert can and spray until only propellant emerges from the nozzle.

Note: Do not spray onto painted surfaces or hot engine.

Art.No	Contents	P.Qty
0892 790	400 ml	12

Engine compartment coating on basis of high-quality acrylic lacquer

New shine on engine, aggregates, cables and hoses

- Visual enhancement and preservation/increase of value.
- Particularly well suited for treatment of used cars.

Forms a protective film.

- Protects against moisture, road dirt as well as salt, thus preventing corrosion.
- Prevents leak currents on electrical components.

High elasticity of coating.

- High flexibility on plastic materials, rubber hoses and cables.

Very good temperature stability(+100°C)

- Prevents discoloration of the engine protection lacquer.
- Protects against softening of paintwork and dust inclusions.

Very good adhesion on various different surfaces. High gloss.

Drying time at 20°C and 50% relative humidity	Dust-dry after approx. 10 min.
	Fast to handling after approx. 60 min.

INTENSIVE WHEEL CLEANER



Art.No	Contents	P.Qty
0893 476	1 ltr	1/6

Application

Spray the wheel rims thoroughly. Let it take effect for approx. 5 minutes and then clean manually or using a car wash. The cleaning effect can be increased by extending the soaking time (up to max. 30 minutes) and by using a

cleaning brush. For bolted and polished wheel rims, rinse well (particularly the bolt connections) with clean water.

Note

Do not use on hot wheel rims or in direct sunlight.

For all painted and unpainted light metal rims and steel rims.

Excellent cleaning performance thanks to gel formula

- Does not run off, allowing the product to take optimum effect
- Even the most stubborn dirt such as brake lining abrasion, gray veil, tar, oil and road dirt are removed very effectively

Acid-free

- Does not damage materials and surfaces
- Especially suitable for polished and very highquality light metal rims
 - Not a hazardous material, so safe to use

User-friendly

- Does not run, so economical to use
- Pleasant non-pungent aroma.
- Can be left to take effect for longer periods (up to 30 minutes)
- Easily separable, i.e. fast-separating in waste water in accordance with German Ecological Standard Test B 510

pH value: 10.0

AOX- and silicone-free

ALUMINUM WHEEL CLEANER



Art.No	Contents	P.Qty
0890 102	500ml	1/12

Application

Spray wheel rims to be cleaned fully and evenly. Particularly with stubborn dirt or rough surfaces, the cleaning effect can be increased by using the

Würth hand brush or sponge. Do not exceed the soaking time of 30 seconds. With unpainted aluminium wheel rims, carry out a thorough material compatibility check in an invisible area.

Acidic special cleaner for light-alloy wheel rims.

Contains phosphoric acid

Removes even the most stubborn brake dust deposits, tar spray and other soiling that is hard to remove

Long-lasting

- Time and cost savings
- Regular use maintains the original appearance. The build-up of new soiling is prevented.

AOX- and silicone-free

Notice

Use only on light-alloy wheel rims. Do not use on hot wheel rims or in direct sunlight. Do not spray on vehicle paint, chrome, highly polished aluminium, plastic or other surfaces.

RIM CLEANER



Highly concentrated alkaline Cleaner, it is recommended for cleaning light alloy and metal rims when necessary, fast acting product able to restore the original brightness of the wheel.

Application

Apply the mixture directly by sprayer or brush on the rims before washing the car, Avoid using any pneumatic applicator.

Technical Data	
PH level	10.8
Dilution Ratio	1:10
Density	1.1g/cm
Silicone-free	Yes

Art.No	Contents	Mix Ratio	P.Qty.
1890 005115	5 ltr	1:6	1
1890 005112	25 kg		1



Rim brush

Art.No. 0891 350211



Auto cleaning sponge

Art.No. 0899 700400



TYRE FOAM



Application

Spray the foam evenly onto the tire side walls and allow it to dry. It does not have to be wiped off afterwards. Can also be used on wet tires. Pre-clean briefly if tires are very dirty.

Note

Do not spray onto fire running surfaces, brake disks and brake drums. Contains silicone.

Art.No	Contents	P.Qty
0890 121	500 ml	12

High-quality care product for tire side walls.

Cleans, preserves, protects

- Simple application in one step, thereby saving time
- Does not have to be wiped off afterwards
- Ideal before putting tires into storage (summer / winter)

Silk matt sheen

- New tire effect
- Improves the vehicle's appearance, making it particularly suitable for display vehicles

Optimum UV and ozone protection

- Tires do not fade
- Prevents brittling and cracking caused by age

Foam

- Economical application
- Medium does not run off

Protects against dust and splash water

Solvent-free

Does not attack paint, plastic, rubber and metals.

AOX-free

TYRE SHINE



Auto cleaning sponge

Art.No. 0899 700400



Art.No	Contents	Mix Ratio	P.Qty.
1890 005097	5 ltr	1:4	1
1890 005092	25 kg		1

Product designed to restore black color tyres and all rubber parts of vehicles. Contains protective agents and demulcents that offer protective agents and demulcents that offer durable restorations. Pleasant apple scented

Features

- Brightner for rubber parts, matt, tyres and car carpets
- Tyre shines is a brightener for plastics and rubber parts. Its special formula protects the parts without damaging them and hinders the action of time.
- Thanks to its neutral PH, does not attack the paints and varnishes, nor corrodes the chrome works and the plastic parts. It gets in touch with glycolic solution.
- Mixing Ratio 1 Ltr – 4 Liters

Silicone-free

INTERIOR CLEANER



Art.No	Contents	P.Qty
0893 033	500ml	1/12

Application

Dashboards, vehicle headliners, door trim panels, seat upholstery, back side of seat backrests, sun visors and console.

Note

Do not spray directly onto sensitive surfaces. Spray interior cleaner into a

clean cloth and wipe off surfaces to be cleaned. Do not use on hot surfaces or in direct sunlight

Use

For optimum foaming, shake can well before use.

Special cleaning foam with anti-static additive for the entire vehicle interior

Cleans all painted and plastic parts, glass surfaces and upholstery of nicotine, dirt and dust

Interior cleaning in one step

Offers temporary protection from dust on the surface thanks to anti-static additive

Longer-lasting cleaning of the interior of your vehicle.

Does not run off on vertical surfaces, i.e. the material stays where it is supposed to

Material is saved due to minimum run-off

Reliably dissolves dirt due to intensive cleaning effect

Time is saved, as repeated wiping is not necessary

Visible white foam

Time and material are saved, as each area only needs to be sprayed once

Always a fresh, pleasant scent inside the vehicle.

Scent: peach

Unpleasant nicotine odours are eliminated from inside your vehicle

Silicone-free

CAR INTERIOR CLEANER



Special cleaner to clean internal parts, carpets and upholstery, suitable for extraction machines. Its particular formula allows to remove the dirt and stains both organic and inorganic origin. Thanks to its bleaching properties it livens up the clothes restoring their original brightness and leave the cockpit pleasantly scented

Technical Data	
PH level	8.1
Dilution Ratio	1:4
Density	1.04 g/cm ³
Scent	Flower
Silicone-free	Yes

Application

Mix the Cleaner with the required concentration with water (recommended for the Top Gun 1:4) apply the cleaner and clean the area with brush or fiber Cloth remove the cleaner with an extractor.

Art.No	Contents	Mix Ratio	P.Qty.
1890 005033	5 ltr	1:7	1
1890 005032	25 kg		1

FI INTERIOR CLEANER



Art.No	Contents	P.Qty
0890 120	1000 ml	12

The environmentally friendly cleaner for the entire vehicle interior

Features

- Fast-separating in accordance with German Ecological Standard Test B 5105
- Biodegradable
- Powerful yet gentle cleaning effect
- Silicone free.

Area of use

Seat covers, neck supports, carpets, vehicle ceiling, door claddings, soiling in the luggage compartment etc.

Application

Simply spray vehicle interior cleaner, let it take effect briefly and then remove the loosened dirt with a brush, cloth or sponge.

DEODORIZER



Art.No	Contents	P.Qty
1890 005764	5ltr	1

Suitable for almost all textiles

- All-purpose product
- Does not leave behind residue
- Does not create spots
- Colorless

Specially selected raw material Combination

- Fast, long-lasting effect
- Odor molecules are not covered up as with air freshener products. Rather, they are removed completely in a natural way

Fine-atomizing hand spray Bottle

Even, fine and full-area wetting of the surface without soaking it.

Very short drying time

Fast application

AOX-free

Silicone-free

Application

Dilute 1 part of the Deodorizer within 5 parts of water. Apply the dilution with spray .

Pump : Art.No. 0891 503001

LEATHER AND DASHBOARD CLEANER



Art.No	Contents	Mix Ratio	P.Qty.
1890 004033	5 ltr	1:10	1

Note

Very old leather to be treated with care

Special environmentally friendly cleaner for vehicle leather and hard surfaces interiors, specially developed to remove dirt and grease from leather surfaces without leaving cracks or dissolving color.

Features

- Specially developed for leather cleaning.
- Does not dry leather or dissolve its color.
- Super effective on vehicle interiors parts made from plastic and metal.
- Painted, aluminum, and chrome surfaces are not affected.
- Can be used as a universal cleaner.

Technical Data	
PH level	9.3
Dilution	1:10
Color	Yellow
Silicone-free	Yes



PLASTIC RESTORER AND SHINER



Art.No	Contents	Mix Ratio	P.Qty.
1890 006033	5 ltr	1:7	1

High-quality plastic care for vehicle interiors and exterior, For protecting and restoring all unpainted plastic and rubber parts on vehicle interiors and exteriors, e.g. bumpers, spoilers, panels, engine compartment, cockpit.

Features

- Protects against ageing and stops the material becoming brittle.
- Water and dirt-repellent.
- Suitable for all types of plastic and rubber
- Paint, aluminum and chrome surfaces are not attacked.
- Long-lasting protection from the effects of weathering.

Technical Data	
PH level	7
Density	1 g/cm ³
Color	milky

SILICONE SPRAY - UNIVERSAL



Art.No	Contents	P.Qty
0893 221	500 ml	12/24

Ensures long-lasting protection, preservation and insulation of exterior and interior plastic, rubber and metal parts; good lubricating properties.

Features

- Gives plastic parts (e.g. bumpers, radiator grilles, spoilers, protective strips, vinyl car roofs etc.) a high gloss and prevents them from cracking
- Rubber parts (e.g. rubber door and bonnet seals, rubber buffers, impact strips, radiator hoses, car tyres etc.) are protected, they do not become brittle and do not freeze or stick
- Waterproofs folding roofs and convertible tops
- Anti-static effect (repels dust)
- Protects electrical contacts against moisture
- Sliding roof and seat rails, safety belt rollers etc. run smoothly
- Prevents squeaking and creaking noises between different materials, e.g. metal and plastic etc.
- Serves as an installation aid, e.g. for hose connections
- Does not stain

LEATHER CARE



Art.No	Contents	P.Qty
0893 012901	500 ml	1

Gentle cleaning and intensive care of smooth leather

Special care emulsion of selected waxes and silicones for all kinds of smooth leather

such as painted, metallic, reptile, brushed, grained leather etc.

Cares for the leather and leaves behind an attractive, visually enhanced shine.

Applications

Smooth leather such as leather equipment in vehicles, shoes, clothes, bags, furniture etc.

Instructions

Apply thinly, leave to dry for at least 20 minutes and polish with a soft brush or cloth.

ACTIVE GLASS CLEANER



Art.No	Contents	P.Qty
0890 25	500 ml	12/24

Application

Dissolves insect residues, bird excrement and road dust, nicotine deposits, greasy soiling, silicone residues and rubber abrasion of glass windows, car windows, mirrors and painted surfaces.

Notice

Do not use on hot surfaces or in direct sunlight. Not suitable for polycarbonate glass.

Cleaning foam for glass and smooth surfaces.

Stable

No running off vertical surfaces.

Extremely high degree of cleaning

- When the foam bubbles burst, highly concentrated, active cleaning agents are transported directly to the dirt
- Outstanding dirt dissolving power

20x yield

- Saves money
- Reduced work expenditure

Gentle on materials

Paints, rubber and plastics are not attacked.

pH value: 9.5 – 10.5

Silicone- and AOX-free

INDUSTRY CLEANER



Art.No	Contents	P.Qty
0893 140	500 ml	1/12
0893 14005	5 ltr	1

Applications:

Cleans machine parts, plastic parts and metallic surfaces of adhesive residues. Also suitable for removing protective preservatives e.g. on brake discs.

Note

Prior to treatment, check rubber and

plastic parts for compatibility in an invisible location. Paints may be attacked.

Proof of performance

NSF registered, class K3, reg. no. 149620, 149621.

High-quality special cleaner for industry and craft trades.

- Easy removal of adhesive residues, labels and adhesive tapes.
- Stubborn dirt such as wax, rubber abrasion, silicone residues, permanent marker, oil and grease are loosened.

Gentle on materials

Sensitive surfaces such as aluminium, brass and stainless steel are not attacked.

User-friendly

- No unpleasant odours for users and the environment.
- Fast and effective cleaning.

Acetone-free

Silicone- and AOX-free

SP1 FOAM GUN



For intensive foam cleaning of surfaces and parts.

Environmentally-friendly.

Your advantage:

Minimal waste water contamination thanks to conservative use of the cleaning agent.

Applications

Cars, trucks, buses, construction machines, land and forestry, vehicle preparation, building facade cleaning, equipment maintenance and much more.

Area of use

Remove loose dirt from the surface to be treated. Fill the supply tank of the SP1 Foam Gun with cleaning agent according to the mixing specifications from the manufacturer. Screw on the appropriate diffuser, depending on the application. Connect the compressed air. Rotate the green lever to the vertical position to open access to the cleaning agent. Cover the object in foam, allow the cleaner to work in (but not dry) and then clean thoroughly with water.



Art.No	Contents	P.Qty
0891 703128	1 ltr	1

Instructions

Do not use cleaning agents that contain acids, bases and/or are easily ammalable. We recommend using BMF Cleaner or Absobon Engine Wash. A constant air pressure of 6 – 8 bar is required for optimum output utilization.

IMPORTANT! After using the SP1 Foam Gun, fill the tank with water and rinse out the gun to remove cleaning agent residue from the unit. Then turn the green lever to the horizontal position and pull the trigger to remove the remaining water from the unit head.

FOAM SPRAYER STAINLESS STEEL



Art.No. 1900 800124

Capacity: 24 Liter

Stainless steel pressure sprayer AISI 304, 24L with foaming device, equipment suitable for the nebulisation of detergents with foaming device, when it is filled with liquid for 3/4 of tank capacity and air pressure inside at 6-8 bar, it works without air source after being pressurized.

Features:

- Capacity 24L
- PVC hose 8m
- Spray gun
- Foaming coupler super
- Manometer with stainless steel case

FOAM SPRAYER STAINLESS STEEL



Art.No. 1900 800511

Capacity: 50 Liter

Stainless steel pressure sprayer AISI 304, 50L with foaming device, equipment suitable for the nebulisation of detergents with foaming device, when it is filled with liquid for 3/4 of tank capacity and air pressure inside at 6-8 bar, it works without air source after being pressurized.

Features:

- Capacity 50L
- PVC hose 8m
- Spray gun
- Foaming coupler super
- Manometer with stainless steel case

TOP GUN



For vehicle care.

Improved technology for better performance

- Ball-bearing drive creates a vortex effect
- Air and cleaning agent supply can be manually adjusted
- Dirt is lifted by the resulting suction
- Articulated connection for more flexible handling (optimum for places that are difficult to reach)

Cleans more thoroughly and effectively

- Micro-atomization results in effective use of cleaning agent
- Dirt is removed extremely quickly
- For use with many Würth cleaning agents



User-friendly thanks to adjustable pneumatic pressure and flexible connection for improved hose handling



Innovative technology for less wear, economical consumption of cleaning agents and improved performance.

Art.No	Designation	P.Qty
0891 703140	Cleaning gun	1

Application

Pre-clean the surface with a vacuum cleaner or a brush. Next, fill the container of the TOP Gun with the recommended mix of the cleaning agent to be used and connect the TOP Gun to the compressed air supply (optimum supply: 8 bar). Move the ball valve into the vertical position (ON) and clean the material slowly and evenly in circular movements. For drying, move the ball valve back into the horizontal position (OFF), as a result of which only air still flows out of the cleaning gun. If there is still moisture in the material after this, it can be removed with a cloth.

Areas of use

Suitable for removing dirt (nicotine staining, footprints, road salt tide marks, dog hairs etc.) from vehicle interiors and exteriors.

Materials to be processed

Rims, door entrances and door trim panels, ventilation ducts, instrument panels, upholstery and headliners, gear shift boots, fuel tank filler necks, license plates and all hard-to-reach places, including outside the vehicle.

TORNADOR GUN



Art.No	Designation	P.Qty
0891 703118	Tornador Gun	1

Application

Clean the surface to be cleaned of loose dirt with a vacuum cleaner or brush. Fill the tank of the Tornador Gun with water and BMF cleaner (according to product description) and then clean slowly and with circular movements of the Tornador Gun at approx. 6-8 bar and a distance of 1-3 cm from the surface. To dry the surface, close the ball valve and wipe dry any remaining residual moisture with a cloth.

Area of use

Excellently suited for cleaning rims, door entrances and door trim panels, ventilation

ducts, instrument panels, yellowing caused by nicotine, upholstery and headliners, footprints on rear seats, road salt rims, shift boot, fuel-tank filler neck, license plates, dog hairs, etc. and for all hard-to-reach places.

Note

We recommend using our BMF cleaner, which is suitable both for plastics and for rubber and paint. To clean the Tornador Gun, hold the nozzle in a water bucket and press the trigger for approx. 20 sec.

Pneumatically driven cleaning gun for thorough cleaning of dirt and soiling in problem areas.

Extended value-added chain.

- Additional service.
- Improved outward appearance.
- Satisfied customers

Inexpensive cleaning

Low cleaning agent consumption thanks to microatomization.

Efficient operation

Soiling is eliminated within an extremely short time.

Thorough cleaning

Thorough, gentle cleaning with simultaneous fresh odor.

Ideal for hard-to-reach areas

Effortless cleaning of gaps, cracks and ducts without cumbersome accessories.

Tornado effect

- Due to swirling effect, soiling is lifted off by the resulting suction.

SPRAY BOTTLE 360°



360° use



Individually markable label

Solvent-resistant suction intake system allows 360° spraying.

- Special suction system allows 360° spraying
- For reliable working overhead, at an angle or vertically.
- Ergonomic, robust spray head with long handle
- Can be used comfortably with three fingers
- Closeable regulating nozzle, up to 15 bar plunger pressure
- Transparent, breakproof 0.5 liter container
- Scale in 100 ml increments
- Suitable for industry, crafts or the workshop.

Art.No	Contents	P.Qty
0891502360	500 ml	1

PUMP SPRAY BOTTLE



Extra fields for safety instructions

For easy application of products from canisters or barrels.

Safe manual tapping from portable vessels

Easier to open, thanks to tactile elements Ergonomic, robust pump spray atomizer with long handle

- Fatigue-free working thanks to low operating force
- Can also be hooked into the mobile workshop

Individually markable label

- Space for labeling the type of liquid filling
- Extra fields for safety instructions

Good stability thanks to conical shape

Art.No	Contents	P.Qty
0891 503001	1000 ml	1

PUMP SPRAY BOTTLE 360°



360° use



Individually markable label

Special intake system allows 360° spraying and ensures reliable working overhead, at an angle or vertically.

Easier to open, thanks to tactile elements Ergonomic, robust pump spray atomizer with long handle

- Fatigue-free working thanks to low operating force
- Can also be hooked into the mobile workshop

Individually markable label

- Space for labeling the type of liquid filling
- Extra fields for safety instructions

Good stability thanks to conical shape

Art.No	Contents	P.Qty
0891 503360	1000 ml	1

SPRAY SUCTION DEVICE SEG 10-2



Art.No. 0701 1110

P.Qty. 1

Powerful spray extraction device for cleaning upholstery and for removing stains from carpeted surfaces.

Very good back suction result

As cleaning results in an extremely low amount of residual moisture, cleaned upholstery and carpets can be used again quickly.

Ideal for cleaning upholstery and car interiors

Compact, space-saving design

Continuous checking of cleaning procedure and back suction performance

Large, transparent cover

Easy and straightforward transport

Practical carry handle and holders for cable and nozzle


1 Years WÜRTH MASTERPLUS

Warranty for wear damage

The current WÜRTH MASTERPLUS warranty conditions must be observed.

Technical Data

Nominal voltage	230 V/AC
Motor output	1380 W
Flow capacity	1 l/min
Underpressure	230 mbar
Fresh water tank	8 l
Dirty water tank	7 l
Weight of machine	9.8 kg
Cable length	7.5 m

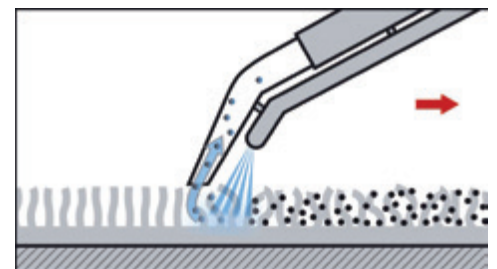

WET & DRY VACUUM CLEANER
HEAVY DUTY

Art.No. 1900 400126
Features

Compact and professional Wet & Dry Vacuum Cleaner with a double stage motor is designed for the cleaning of small spaces.

It is available with stainless steel or polypropilene 21/23 litres tank.

Technical data	
Number of motors	1
Stage	Double
Volt	220 - 240 V
Frequency	50/60 Hz
Cooling	by pass
P Max	1400 W
P	1200 W
Waterlift mmH ₂ O	2400 mmH ₂ O
Air Flow	215 m ³ /h
LpA Sonorus 3ml	60 dB(A)
Total Tank Capacity	21/23 ltr
Weight	9.2/10.1 kg

Standard Accessories

Description	Art.No.	P.Qty
1. Accessory kit • Little tool ø36 • Crevice tool ø36 • Chrome extension wand ø36 • Steel combined nozzle ø36 • Liquids nozzle ø36 • Dusting brush ø36	1709 401251	1
2. Complete flexible hose 2.0M ø36	1709 400126	1
3. Polyester Filter With Ring ø34	1709 400127	1
4. Sponge Filter For liquids	1709 400132	1

Optional Accessories and filter

Description	Art.No.	P.Qty
5. Paper Bag 20 Liters	1709 400128	1
6. Polyester Bag 20 Liters	1709 400129	1
7. Cartridge Filter ø175 - H140	1709 400130	1
8. Nylon Filter ø334	1709 400131	1
9. Rotating Brush	1709 400133	1



WET & DRY VACUUM CLEANER

HEAVY DUTY



Art.No. 1900 400376

Features

Wet & Dry Vacuum Cleaner with one, two or three double stage motors till reaching 3600W maximum power. Provided with tipping trolley for an easy emptying of dirty liquids this model is ideal for professional cleaning. Available with stainless steel or polypropilene 76 litres tank cleaning.

Technical data	
Number of motors	3
Stage	Double
Volt	220 - 240 V
Frequency	50/60 Hz
Cooling	by pass
P Max	3600 W
P	3150 W
Waterlift mmH ₂ O	2400 mmH ₂ O
Air Flow	645 m ³ /h
LpA Sonorus 3ml	68 dB(A)
Total Tank Capacity	77/76 ltr
Weight	27.1/29.0 kg

Standard Accessories

Description	Art.No.	P.Qty
1. Accessory kit • Crevice tool ø40 • Chrome extension wand ø40 • Chrome curved extension wand-male ø40 • Nozzle body NP L 400 ø40 • Slide-on for liquids nozzle L400 • Slide-on brush for floor nozzle L400 • Dusting brush ø40	1709 4003751	1
2. Complete flexible hose 2.5M ø40	1709 400376	1
3. Polyester Filter With Ring ø44	1709 400377	1
4. Sponge Filter For liquids	1709 400383	1

Optional Accessories and filter

Description	Art.No.	P.Qty
5. Paper Bag 77 Liters	1709 400378	1
6. Polyester Bag 77 Liters	1709 400379	1
7. Cartridge Filter ø250 - H178	1709 400380	1
8. Nylon Filter ø440	1709 400381	1
9. Accessory basket	1709 400382	1



HIGH-PRESSURE WASHER 130 BAR COMPACT



Art.No. 0701 1610

P.Qty. 1

Compact cold water high-pressure washer for medium-duty cleaning jobs.

- **Ideal for mobile use**
Compact design and adjustable aluminium push handle.
- **Long service life and reduced consumption**
If work is interrupted, the automatic pressure cut-out switches the device off immediately. Relieving the pressure on the components prolongs the service life of the pump and reduces energy and water consumption.
- **Fast, simple changes and dosing of the cleaning agent**
The required concentration can be set using the dosing valve. The integral suction hose for cleaning agent fits into any container.
- **Comfortable, low-fatigue work**
Ergonomic manual spray gun with reduced retention and pulling force.
- **Easy to store**
Practical accessory holder and electrical cable winding mechanism

Notice

For use with cleaning agents, observe the following steps:

- Pull out the suction hose for the cleaning agent.
- Hook the cleaning agent suction hose into a container of cleaning agent.
- Set the triple nozzle to „CHEM“.
- Set the cleaning agent metering valve to the required concentration.

Technical Data	
Nominal voltage	230 V/AC
Power input	2.3 kW
Max. pressure	130 bar
Working pressure	130 bar
Min./max. feed quantity	0-480 l/h
Max. inlet temperature	60 °C
Hose length	10 m
Length	230 mm
Width	375 mm
Height	925 mm
Weight of machine	26.1 kg
Cable length	4 m

PROFESSIONAL H.P. WASHER 200 BAR 7.5HP

Art.No. 1900 000006 – WE

P.Qty. 1



Application

Professional h. p. washer enables a perfect wash, easily, safely and effortlessly. It has been entirely designed, engineered, patented and manufactured from A to Z. It is ideal for companies that use the h.p. washer up to 8 hours a day.


Features

- Frame set made of chromed steel and protected by transparent paint.
- Thermoformed cover in polystyrene.
- Professional pump 1450Rpm, crankshaft, brass head, 3 ceramic plunger.
- Electric motor 1450Rpm 50Hz, complete with ON/OFF circuit breaker switch, and 5m electric cable.
- Dimensions W x L x H: 815 X 590 X 1042mm.

Standard Equipment

- H.p. hose R1 5/16" 10m, screw quick couplings M22x1.5 F-F.
- Spray gun RED 50, inlet M22x1.5m.
- Lance 700mm.

Optional

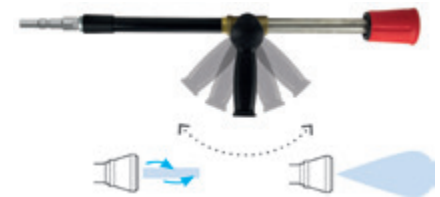

Canon

Art.No. 1709 00000624

Technical Data

Art.No	Pressure	Flow Rate	Rpm	Power	Weight
1900 00006	200 bar	15l/min	1450	7.5hp (3x400V-50hz)	88kg

Application



Visible pump

Professional: 50% less maintenance time



Control panel

Safe: IP56 certified
Simply: only one circuit breaker switch, no electronics



Simple and Sturdy

Attractive design, east to use and sturdy structure



"Comfort line" Accessories

When working help well – being

CYLINDER AIR COMPRESSORS



Description

- Belt driven twin cylinder compressor
- High performance at low running speeds.
- Cast iron cylinders.
- Reduced vibrations, which also reduces the noise level.
- Oil level inspection glass.
- Synthetic oil to ensure improved lubrication of moving parts
- Epoxy powder coating to guarantee perfect and lasting wear.
- Total absence of oil leaks thanks to the special constructional shape of the single-piece casing.
- Pressure switch with overload protection.

Art No.	Tank Capacity (L)	Motor Power (KW - HP)	Air Delivery (l/m - CFM)	Cylinder /stage	Round per Mintues	Volt/hz/ Phase	Max Working Pressure (bar - PSI)	Sound Pressure dB(A)	Wheels	No. of. Head
1900 524100	100	1.5 - 2	250 - 8.8	2/1	1240	230/50/1	10 - 145	74	Yes	Single Head
1900 524270	270	2.2 - 3	350 - 12.4	2/1	1500	230/50/1	10 - 145	74	Yes	
1900 525270	270	4 - 5.5	600 - 21.1	2/2	1270	400/50/3	10 - 145	75	Yes	
1900 525500	500	5.5 - 7.5	830 - 29.3	2/2	1280	400/50/3	10 - 145	76	No	
1900 525510	500	7.5 - 10	1080 - 38	2/2	1080	400/50/3	10 - 145	77	No	

CYLINDER AIR COMPRESSORS - DOUBLE HEAD



Description

- Belt driven twin cylinder compressor
- High performance at low running speeds.
- Cast iron cylinders.
- Reduced vibrations, which also reduces the noise level.
- Oil level inspection glass.
- Synthetic oil to ensure improved lubrication of moving parts
- Epoxy powder coating to guarantee perfect and lasting wear.
- Total absence of oil leaks thanks to the special constructional shape of the single-piece casing.
- Pressure switch with overload protection.

Note: The item might be slightly different from the item in the picture above depends on model, the compressor is without wheels

Art No.	Tank Capacity (L)	Motor Power (KW - HP)	Air Delivery (l/m - CFM)	Cylinder /stage	Round per Mintues	Volt/hz/ Phase	Max Working Pressure (bar - PSI)	Sound Pressure dB(A)	Wheels	No. of. Head
1900 526500	500	4+4 - 5.5+5.5	1200 - 42.4	2/2	1270	400/50/3	10 - 145	77	No	Two Head Two Motor
1900 526510	900	7.5+7.5 - 10+10	2140 - 75.6	2/2	1270	400/50/3	10 - 145	78	No	

AIR COMPRESSOR - LUBRICATED DIRECT DRIVEN



Description

- Plastic cover protects hot and rotating parts
- Direct driven with full cast iron cylinder
- Large oil crankcase for long life operation
- Rubber wheels
- Ergonomic handle
- Double gauge

Art No.	Tank Capacity (L)	Motor Power (KW - HP)	Air Delivery (l/m - CFM)	Cylinder /stage	Volt/hz/Phase	Max Working Pressure (bar - PSI)	Sound Pressure dB(A)	Wheels	No. of. Head
1900 524024-WE	24	1.5 - 2	170 - 6	1/1	230/50/1	8 - 116	72	Yes	Single Head
1900 524050-WE	50	1.5 - 2	170 - 6	1/1	230/50/1	8 - 116	72	Yes	

PNEUMATIC HOSE WINDER DSA-S



Art.No. 0699 00811

P.Qty. 1

Practical safety hose winder with high-quality polyurethane hose for order and safety in the workplace.

Safe and comfortable work

The hose is guided from left to right while being wound up, preventing knots. The brake function minimises the risk of the hose being flung around in an uncontrolled manner if it is inadvertently released.

Protection against pollution

The robust, enclosed plastic housing protects the hose and the rolling mechanism from dust and other contaminants.

High resistance to kinking with an extremely low weight as well as resistance to oils and solvents. Excellent behaviour in low and high temperature ranges.

High-quality polyurethane hose (PUR)

No pressure drop for more efficiency and cost savings


Hose has a high flow capacity as well as an innovative connection valve on the reel unit

Can be mounted on the wall, ceiling or floor

Bracket ensures a secure attachment to straight surfaces.

Low maintenance costs

Hose can be replaced without opening the housing.

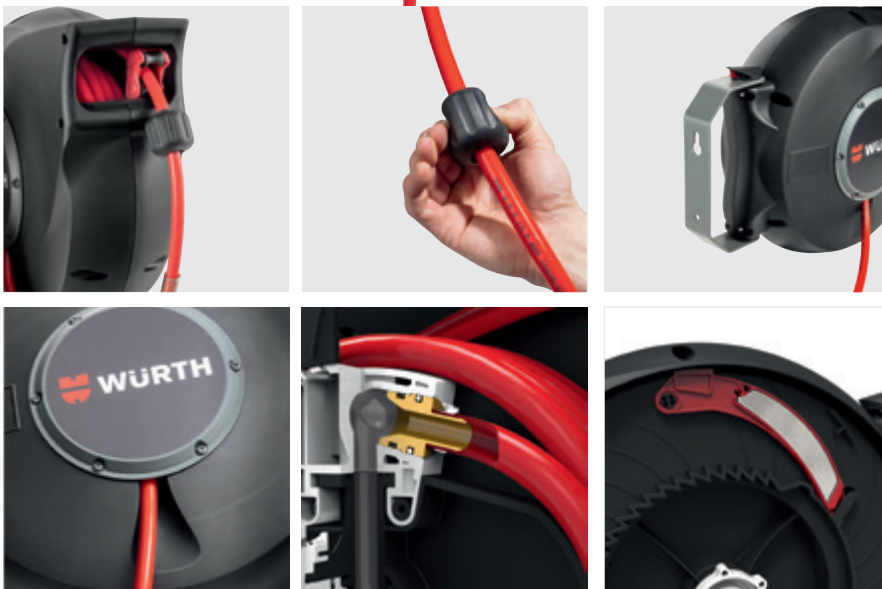

Art.No.	0699 00811	0699 08018
Version	With R 1/4 inch external thread	With R 1/4 inch external thread
Hose length	11 m	18 m
Inner hose diameter	8 mm	8 mm
Max. pressure	16 bar	16 bar

ROLL CLEANING PAPER



For improving the appearance of all plastic parts on cars.

Features

- Highly absorbent
- Fits all common dispensers
- In various plies and widths
- Virtually lint-free
- Compatible for use with food
- High absorption capacity and tear-resistant

Area of use

The cleaning paper is suitable for cleaning surfaces in a range of fields (vehicles, metalwork, kitchen construction). Soiling such as oil and grease can be removed with the cleaning paper. Due to the high strength of the cloth, surfaces can also be cleaned of coarse materials such as chips and edges.

Art.No	Color	Format L x W cm	Sheets	P.Qty
0899 800773	Blue, 2-ply	36 x 38 cm	1,000	2

KABRAH - COTTON RAG



Features

- Very high absorbency.
- Free of hooks, eyelets, buttons and zippers.
- Complies with DIN 61650.

Art.No	Type	Color	P.Qty
1984 5555	10 kg bag	White	1
1984 5556	10 kg bag	Pure white	1
1984 5558	10 kg bag	Mixed	1

ROLLER STAND WITH WHEELS FOR CLEANING PAPER



Art.No. 0899 800606

P.Qty: 1

Floor stand for cleaning paper rolls

With wheels and garbage bag holder

Technical Data	
Width	50cm
Height	86cm
Depth	68cm
Max.roll width	38cm
Color	red

WALL MOUNTED FOR CLEANING PAPER



Art.No. 0899 800607

P.Qty: 1

Wall-mounted roll holder for cleaning paper rolls

With garbage bag holder

Technical Data	
Width	50cm
Height	63cm
Depth	32cm
Max.roll width	38cm
Color	red

Garbage bags

ArtNo. 0899 800581



A/C DISINFECTANT FOAM



Art.No. 1893 764999

Contents: 2 x 100ml

A/C disinfection foam use instructions

1. Switch the engine and the vehicle's A/C system off.
2. Remove the cabin filter away.
3. Spray using the hose approx. half of the product directly on the evaporator.
4. Spray the remaining product into the air ducts.
5. Wait approx. 20 minutes for the product full effect.

Quick fresh use instructions

1. Turn the engine and the a/c system on (with recycling mode only)
2. Put the can inside the cockpit, best if on the carpet floor.
3. Press the total - release button, close the doors and let it act for approximately 15 minutes
4. Refresh the cockpit before entering

QUICK FRESH ACTIVE



Art.No. 0893 764650

Contents: 100ml

For effective elimination of odours from vehicle interiors and air-conditioning units in vehicles.

User-friendly

- Reduces unpleasant odours
- Long-lasting effect thanks to antibacterial silver ions
- Has a preventive effect against bacteria and fungi
- No costly disassembly work required on the evaporator and vehicle interior
- No additional manual for specific work steps required

Universal, flexible and mobile

- Same work steps for all vehicle types
- Flexible in application, mobile in use

Enhanced value creation

Chargeable unit - one can for one application.

With long-lasting fresh scent

**AOX- and silicone-free
Water-based**

Note: Preliminary tests are essential before use, especially on light surfaces.

RECHARGEABLE HAND LAMP LED

ERGOPOWER BOOST



Art.No. 0827 940455

P.Qty. 1

Latest lithium-ion battery technology

- Short charging time, long light duration

Boost function

- Boost main light function with 1000 lumen output delivered

Features

- Exclusive Würth design
- Two-component housing with good grip
- IP65 protection against water and dust
- One hooks for high flexibility
- Wrist strap
- Main light 5W SMD LED, spot light 1W LED
- Spot light above the luminaire head – flashlight function
- Switch mode – spot light, main light, off
- Luminaire head can be swiveled by 160°
- Battery charging status by three indicator lights
- Strong magnet on the bottom and back of the light
- Latest lithium-ion battery technology
- Short charging time, long light duration"

Includes

- USB cable
- Car charger



Technical Data	
Selectable colour temperature	6000 K
Min. colour rendering index (CRI)	70
Luminous flux (Main light BOOST)	1000 lm
Luminous flux (Main light)	500 lm
Luminous flux (spot light)	300 lm
Luminous period (Main light BOOST)	2.5 h
Luminous period (Main light)	5 h
Luminous period (Spot light)	8 h
Charging time	5 h (charged by 5VDC/1A adapter)
IP protection class	IP 65
IK impact resistance	IK 08
Nominal voltage	5 V/DC
Rechargeable battery/battery capacity	4200 mAh
Work temperature	-10°C+40°C
Length x width x height	275 x 56 x 38 mm
Weight	441 g

Notice: Li-Ion battery: 3.7V, 16.28Wh, 18650-4400mAh, Art. 0827 940457



Rechargeable
battery

IP65 IK08

RECHARGEABLE HAND LAMP LED

ERGOPOWER

Art.No. 0827 940221

P.Qty. 1



Latest lithium-ion battery technology

- Short charging time, long light duration

Features


- Exclusive Würth design
- Two-component housing with good grip
- IP65 protection against water and dust
- Two hooks for high flexibility
- Wrist strap
- Main light 3W COB LED, spot light 1W LED
- Spot light above the luminaire head – flashlight function
- Switch mode – spot light, main light, off
- Luminaire head can be swiveled by 160°
- Battery charging status by three indicator lights
- Strong magnet on the bottom and back of the light
- Latest lithium-ion battery technology
- Short charging time, long light duration

Includes

- USB cable

Technical Data	
Selectable colour temperature	6000 K
Min. colour rendering index (CRI)	70
Luminous flux (Main light)	250 lm
Luminous flux (spot light)	80 lm
Luminous period (Main light)	3.5 h
Luminous period (Spot light)	7 h
Charging time	4h (charged by 5VDC/1A adapter)
IP protection class	IP 65
IK impact resistance	IK 08
Nominal voltage	5 V/DC
Rechargeable battery/battery capacity	2100 mAh
Work temperature	-10°C+40°C
Length x width x height	275 x 56 x 38 mm
Weight	357 g

Notice: Li-Ion battery: 3.6V, 7.56Wh, 18650-2100mAh Art. 0827 940229



Rechargeable
battery

IP65 IK08



ASSEMBLY WEDGE SET

Art.No. 0714 58245

P.Qty. 1

12-piece for removing interior paneling and fixing elements.

Slim, sturdy design

Glass-fiber reinforced plastic.

Large assortment of tools

Assembly wedges for numerous tasks.

Includes high-quality roll-up pouch

Clear, space-saving storage.

Material

Glass-fiber reinforced polyamide

Spare parts sets

- 4-piece assembly wedge kit, contents: A, B, C, D, Art. No. 071458 246
- 4-piece assembly wedge kit, contents: E, F, G, M, Art. No. 071458 247
- 4-piece assembly wedge kit, contents: N, O, P, L, Art. No. 071458 248



DENT LIFTER AND PINPULLER® SET



Dent Lifter Set

Dent removal system with adhesion technology.

Art.No. 0691 500111

P.Qty: 1

PinPuller® Set

Universal dent removal system with welding and adhesion technology.

Art.No. 0691 500169

P.Qty: 1

- Paint does not need to be removed.
- Interior trims do not need to be removed, and the battery does not need to be disconnected (no welding).
- The minimal heat generated means that sensitive parts can be worked with as well.
- Easy removal of the adhered pulling adapters by spraying on adhesive remover.
- Area of use: Painted surfaces, sheet steel and aluminum. Sheet thicknesses from 0.5 - 2 mm

HOT GLUE GUN



Art.No. 0702 6231

HKP 220 in carrying case

Especially high-performance glue gun, excellently suited for all assembly, repair, fixation and decoration work.

Adjustable working temperature

Melting point and application temperature can vary from adhesive to adhesive. The HKP 220 enables the heating capacity to be matched and adjusted individually to the adhesive.

Exact dosing

The trigger can be adjusted via a mechanical stroke limitation so that the same amount of adhesive is applied each time it is operated.

Fatigue-free working

The long trigger corresponds to ergonomically perfect use. The stroke limitation described above can also be used for the optimal ergonomic adjustment of the distance of the trigger from the handle to the user's own hand size.

Scope of delivery		
Description	Art.No.	P.Qty
Hot Glue Gun HKP 220	0702 623...	1
Round nozzle	0708 623008	1
Hot-melt adhesive, standard - transparent -	0890 100052	10
Empty Carrying Case	0955 702623	1

Technical Data					
Operating voltage	Power draw	Application temperature	Melting capacity	Weight	Size in mm
220-240 V/50 Hz	220 W	140-220 °C	0.7-1.2 kg/h	0.6 kg	290 x 230



HOT AIR BLOWER HLG2300-LCD



Art.No. 0702 2030

P.Qty. 1

Handy, lightweight device with continuous temperature and air flow regulation. Additional LCD display with memory function.

LCD display

- Frequently used settings can be saved
- Permits simple temperature and air flow regulation, 4 presettings also stored

Long service life

Rugged ceramic heater with low impact sensitivity

Lightweight and ergonomic

Making it possible to work for long periods without fatigue.

HOT AIR BLOWER HLG 2000 COMPACT



Art.No. 5707 2510

P.Qty. 1

Handy, lightweight device with 10-stage temperature regulation

- Long service life of up to 750 hours
- Rugged ceramic heater with low impact sensitivity.
- The lightweight and ergonomic design means that even longer tasks can be carried out with little fatigue.

GEAR SHIFT COVER



Art.No. 0899 500015-1

P.Qty. 1

LDPE flat bag with elastic band

Features

- Continuous film suitable for all gear shift types
- Material: LDPE flat bag with elastic band
- Material thickness: 20 µm
- Dimensions: 140 m x 130 mm (L x W)
- Color: White
- Content: 500 pcs in dispenser box.

PROTECTIVE STEERING WHEEL COVER



Art.No. 1899 5000251

P.Qty. 1

Features

- One roll is sufficient for approx. 215 steering wheels
- Continuous film suitable for all steering wheel types
- Material: PE adhesive film, transparent
- Material thickness: 14 µm
- Dimensions: 300 m x 140 mm (L x W)

Handle

Art.No. 1891 5000251



5-IN-1 CAR CLEAN SET



Art.No. 0899 500004

P.Qty. 1

Protect against dirt & soiling during repair and maintenance work.

Features

- Perfect fit, suitable for most passenger car interiors.
- Transparent headrest area enables a clear view when driving in reverse and during test drives.
- Easy logistics, because it's just one article.
- All protectors are packed in a pre-cut dispenser carton.

DISPOSABLE SEAT COVER



Does not interfere with airbags

- White oil- and water-resistant PE film
- Optimum material thickness enables elasticity in all directions thanks to film thickness of 13µm (0.013 mm)
- Precise perforations ensure high-quality tear-off
- Easy to unroll without the film running askew
- Protected from dust by a practical dispenser box

Art.No	Length	Width	Qty. on roll in pieces	P.Qty
1899 50001	1350 mm	820 mm	500 pcs	1
1899 50001250	1350 mm	820 mm	250 pcs	1

DISPOSABLE STEERING WHEEL COVERS



Elastic and slip-resistant

- White oil- and water-resistant PE film
- Optimum strength and elasticity thanks to its high material thickness of 39µm (0.039 mm)
- One roll is sufficient for approx. 500 steering wheels
- Precise perforations ensure high-quality tearing off
- Protected from dust by a practical dispenser box

Art.No	Dia. mm	Width	Roll width	Roll weight approx.	Tear-offs per roll	P.Qty
0899 50002	up to 550 mm	150 mm	300 mm	2.9 kg	500 g	1

SELF-ADHESIVE PROTECTIVE FILM



Art.No. 0818 800050

P.Qty. 1/4

For protecting and covering sensitive surfaces.

Application is clean, quick and easy.

- Self-adhesive
- No scratching of or damage to the surfaces during application.
- Easy removal of the film without adhesive residue.
- Recyclable (environmentally-friendly disposal)

Art.No	Designation	Thickness	Dimensions	Color	P.Qty
0818 800050	Protective film SK 8	80 µ	500mm x 100m	White	1/4

CAR CARE

WÜRTH GULF FZE

P.O.Box: 17036 Jebel Ali South 6,
Dubai, United Arab Emirates.
T: +971 4 8809991
F: +971 4 8809255
E: wurthgulf@emirates.net.ae
www.wurth.ae, www.wuerth.com

DUBAI SHOWROOM

318th Almidan Road, Al Quoz
Industrial 4, Dubai, U.A.E.
T: +971 4 3397141
F: +971 4 3419303
E: dxbpickshop1@wurthgulf.ae

ABU DHABI SHOWROOM

11 St. Mussafah 14
Abu Dhabi, U.A.E.
T: +971 2 5544155
F: +971 2 5544199
E: adpickshop1@wurthgulf.ae

SHARJAH SHOWROOM

3rd Street Industrial Area 6
Sharjah, U.A.E.
T: +971 6 5301408
F: +971 4 8809255
E: shjpickshop1@wurthgulf.ae

AL AIN SHOWROOM

Nahyan, The First St.
Near Grand Hafeet Station,
Al Ain, Abu Dhabi U.A.E.
T: +971 3 7668402
E: alnpickshop1@wurthgulf.ae

FUJAIRAH SHOWROOM

Al Hail Area, Mohd Hamad
Saleh Al Kaabi Building,
Fujairah, U.A.E.
T: +971 9 2238778
E: fujpickshop1@wurthgulf.ae

